
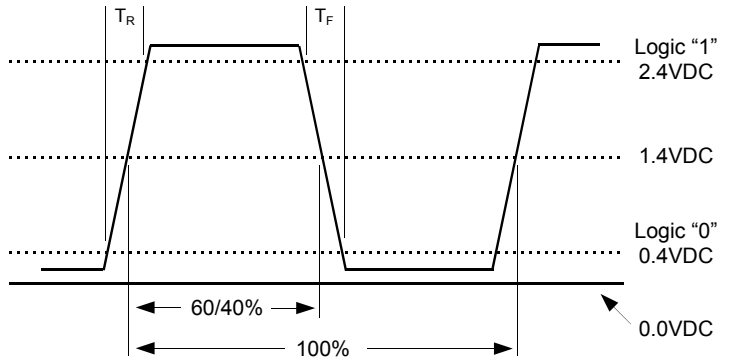


Features of the CO series clock oscillator:

- RoHS compliant available
- 5VDC
- Industry standard (14 & 8 pin dip compatible)
- Fast rise and fall times
- Case ground for low EMI
- Hermetically sealed / resistance welded
- Wide frequency range

MODEL	CO	
FREQUENCY RANGE	10.0 kHz ~ 69.99 MHz	70.000 MHz ~ 160.000 MHz
FREQUENCY STABILITY	±100ppm Standard, Optional Tolerances Available	
OPERATING TEMP. RANGE	0°C ~ 70°C Standard, Extended Tolerances Available	
STORAGE TEMPERATURE	-55°C ~ +125°C	
SUPPLY VOLTAGE	+5.0 VDC ±10%	
CURRENT CONSUMPTION	10.0 kHz ~ 23.999 MHz 15mA Max. 24.000 ~ 69.000 MHz 30mA Max.	70.000 ~ 99.999 MHz 30mA Max. 100.000 ~ 129.999 MHz 35mA Max. 130.000 ~ 160.000 MHz 40mA Max.
SYMMETRY	40/60% @ 1.4VDC Standard, Optional Tolerances Available	
LOGIC "1" & "0"	Logic "1" = 2.4VDC Min. / Logic "0" = 0.4VDC Max.	
RISE/FALL TIME (T _R , T _F)	10 nS max	4 nS Max.
OUTPUT LOAD	10 TTL Max.	2 TTL Max.
Aging	< 5ppm per year	

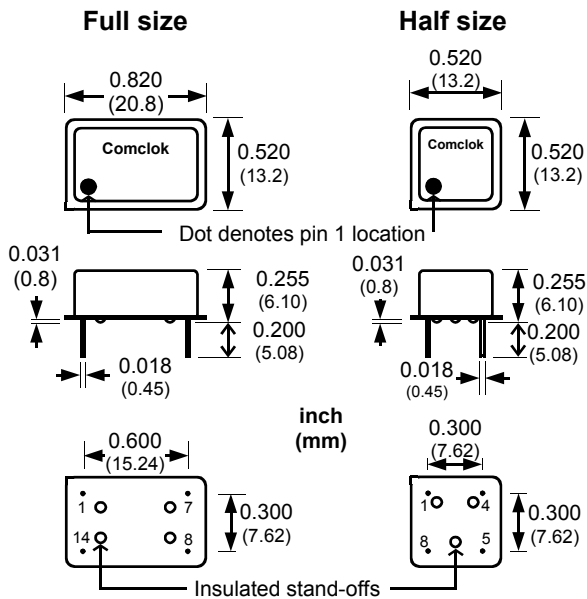

Full Size CO (14 pin)	
# 1	N.C.
# 7	GND
# 8	OUTPUT
# 14	+5.0 VDC ±5%

Half Size CO (8 pin)	
# 1	N.C.
# 4	GND
# 5	OUTPUT
# 8	+5.0 VDC ±5%



Comclok, Inc.

www.calcrystal.com

15302 Bolsa Chica Street, Huntington Beach, CA 92649
 Ph: 714-991-1580 / 800-333-9825 Fax: 714-491-9825

e-mail: sales@calcrystal.com