

Common Mode Choke SMD (2.0 X 1.2 X 1.2 mm)

FEATURES

- High common mode impedance at high frequency
- excellent noise suppression performance
- Ideal for use as common-mode chokes for USB2.0, IEEE 1394, and LVDS
- Halogen Free RoHS compliant




SPECIFICATION

Part No.	Common Mode Impedance typ. (Ω)	Tolerance Max (%)	Rated Current Max (mA)	Rated Voltage (VDC)	Insulation Res Min ($M\Omega$)	Withstanding Voltage (VDC)	DC Res Max (Ω)
T4FC2012F-670	67 @ 100MHz	25	400	50	10	125	0.25
T4FC2012F-900	90 @ 100MHz	25	330	50	10	125	0.35
T4FC2012F-121	120 @ 100MHz	25	370	50	10	125	0.30
T4FC2012F-161	160 @ 100MHz	25	330	50	10	125	0.33
T4FC2012F-181	180 @ 100MHz	25	330	50	10	125	0.35
T4FC2012F-221	220 @ 100MHz	25	310	50	10	125	0.35
T4FC2012F-261	260 @ 100MHz	25	300	50	10	125	0.40
T4FC2012F-371	370 @ 100MHz	25	280	50	10	125	0.40
T4FC2012F-671	670 @ 100MHz	25	250	50	10	125	0.40


- Electrical measurements at ambient temperature of 20°C
- Test equipment: HP4291B

DIMENSIONS

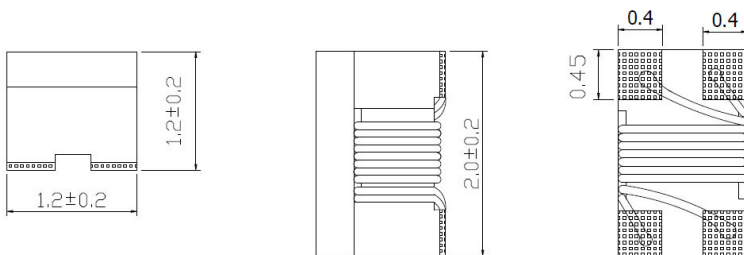


Dimension in m/m

SCHEMATIC




SOLDER PATTERN




CHARACTERISTICS


Common mode curve

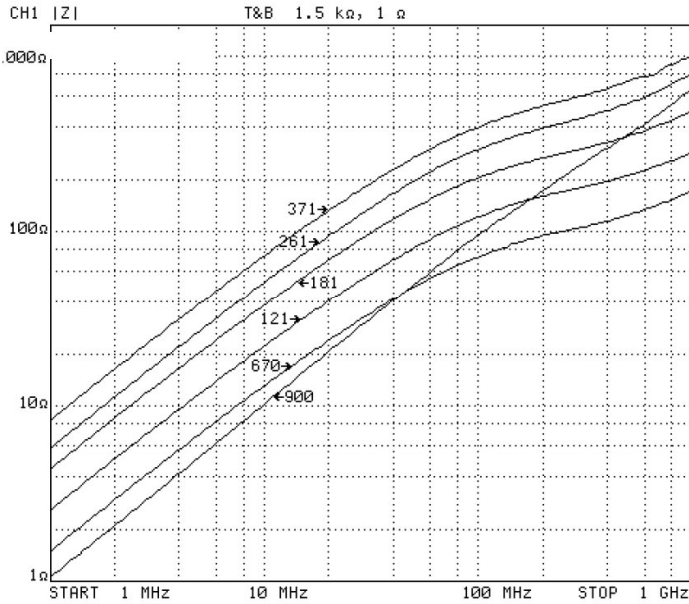


Normal mode curve

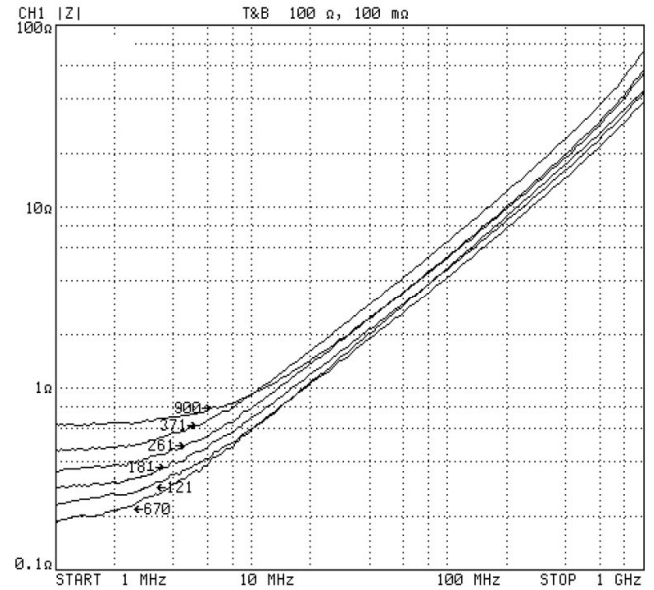

TEST CIRCUIT




Common mode




Normal mode


RELIABILITY TEST

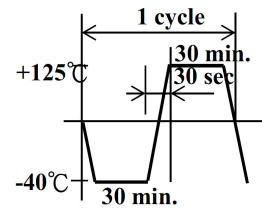Operating temperature : -40 to +125°C		Storage temp and humidity : -40~125°C ,60% RH max
ITEM	SPECIFICATIONS	TEST CONDITIONS
Solderability	The metalized area must have 90% minimum solder coverage.	Dip pads in flux and dip in solder pot (99 Sn or 96.5 Sn/3.5 Ag solder) at 232°C ±5°C.
Resistance to soldering heat	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be reflowed onto a PC board using 96.5 Sn/3.5 Ag or 99 Sn solder paste. Solder process shall be at a maximum temperature of 260°C. For 99 Sn solder paste: >183°C for 120 sec. For 96.5 Sn/3.5 Ag solder paste: >217°C for 90 sec
Vibration	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Solder specimen inductor on the test printed circuit board. Apply vibrations in each of the x,y and z directions for 2 hours for a total of 6 hours. Frequency : 10~50 Hz ; Amplitude : 1.5mm
High temperature resistance	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to temperature 125±2°C for 500±12 hours. Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.
Static Humidity	Inductors must not have a shorted or open winding.	Inductors shall be subjected to temperature 85±2°C and 90 to 95%RH. for ten 24-hours. Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.
Component adhesion (push test)	Inductors shall be subjected to 1.8Kg	Inductors shall be reflow soldered (232°C ±5°C for 10 seconds) to a tinned copper substrate. A force gauge shall be applied to the side of the component. The device must withstand the stated force without a failure of the termination.
Low temperature storage	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to temperature -40±2°C for 48±12 hours. Measure the test items after leaving the inductors at room temperature and humidity for 1 to 2hours.
Resistance to solvent	There must be no case deformation or change in dimensions, or obliteration of marking	Inductors must withstand 6 minutes of alcohol or water.
Thermal shock	There must be no case deformation or change in dimensions. Inductance must not change more than the stated tolerance.	Inductors shall be subjected to 10 cycles to the following temperature cycle:  Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.


LEAD-FREE HEAT ENDURANCE TEST

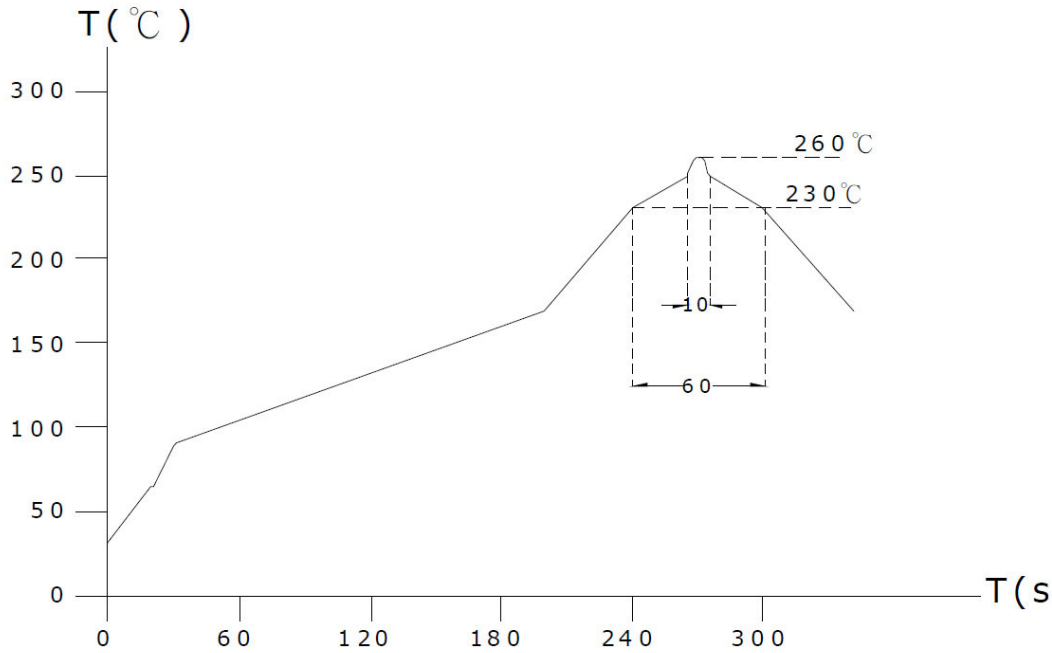

LEAD-FREE RECOMMENDED REFLOW

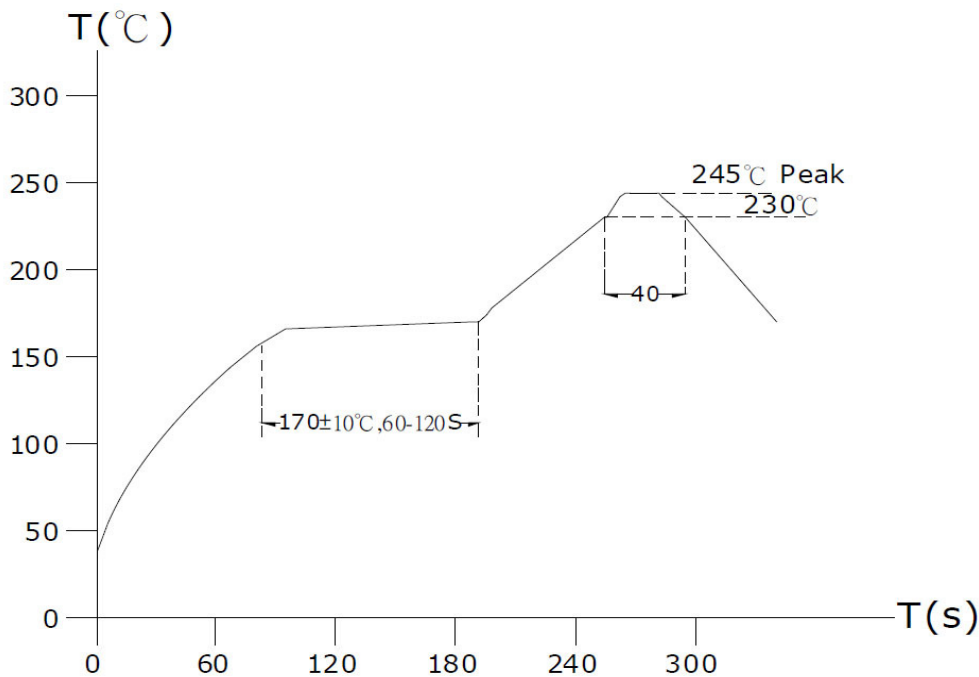

REEL DIMENSIONS (2000 pcs per reel)

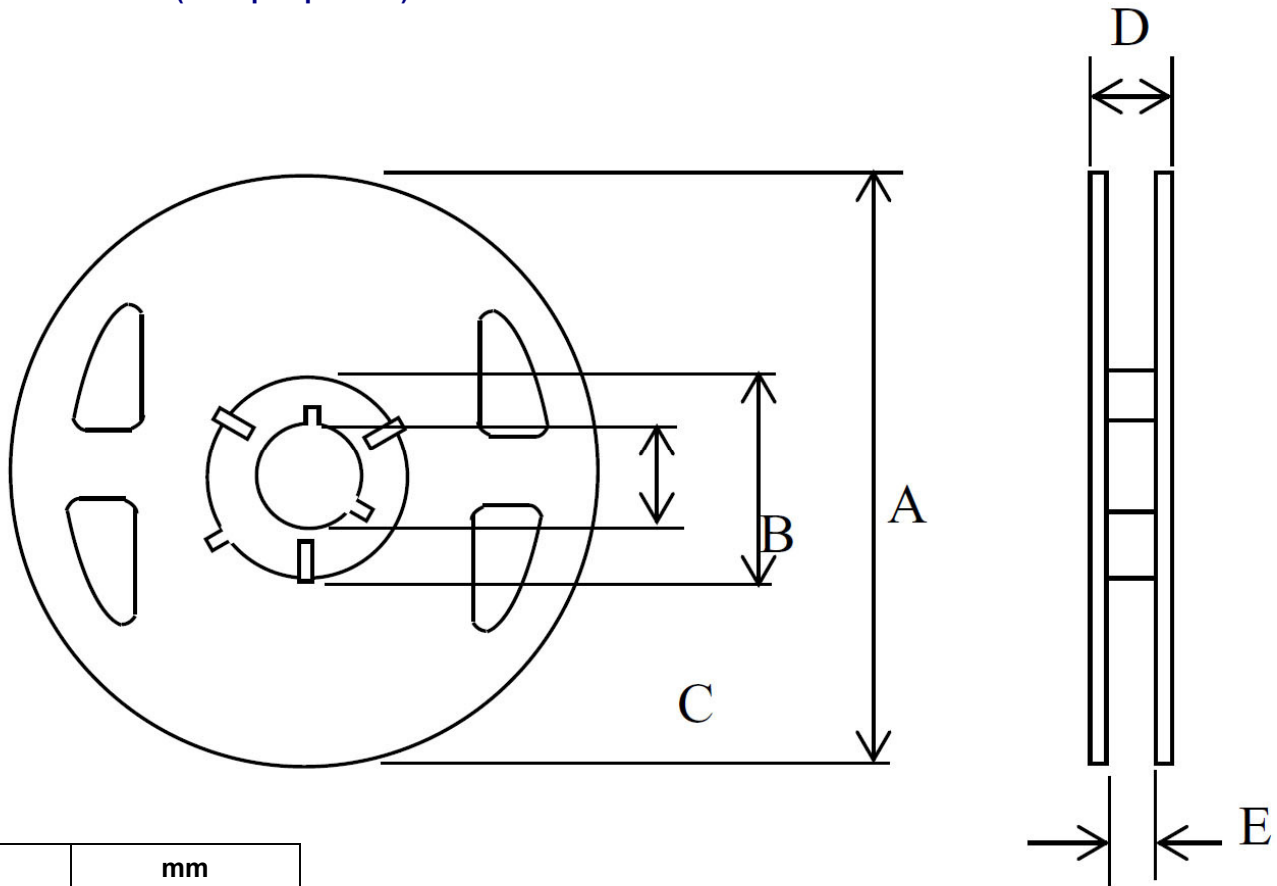

	mm
A	180
B	60
C	13 +0.5 / -0.2
D	14.4
E	8.4

